


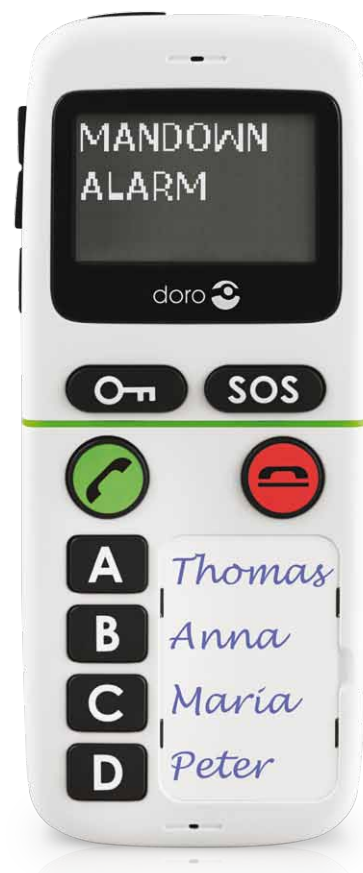


# HandlePlus 334gsm IUP

personal alarm for isolated user protection

-  automatic and user-activated alerts
-  detects fallen and motionless states
-  4 memory buttons

Extremely easy to use mobile phone with same functions as HandlePlus 334gsm but featuring automatically activated mandown and motionless alert functions. An excellent security device for people who live or work alone and may need help.



doro® 

care electronics



alarmbutton on the backside

# HandlePlus 334gsm IUP

Colour: white

<b>Mandown</b>		<b>Ringer sound &amp; hearing</b>	
Mandown alarm	•	Polyphonic ring tones	10
Horizontal detection	•	Ringer volume settings	7
Vertical detection	•	Maximum ringer volume (dB(A) at 1 meter)	>83
Motionless detection	•	Vibration alert	•
Automatic dial up on man-down detection	•	Hearing Aid Compatible	T3/M3
<b>Calling/Talking</b>		<b>Emergency call settings</b>	
Dedicated memory keys	5	Emergency SMS	•
Handset volume settings	7	Emergency call list dialing	•
Speakerphone	•	Automatic fall detection emergency call trigger function	Optional
Speaker volume control	7	<b>Security</b>	
Headset outlet	•	SIM pin on/off	•
Headset volume setting	7	Change SIM pin	•
On/off hook button on headset cable support	•	<b>Others</b>	
Keylock	•	Power on/off dedicated key	•
Auto keylock	•	Soft touch coating	•
Single key keylock operation	•	<b>Mechanical</b>	
Backlit keypad	•	Size (mm)	125*52*15
Call timer	•	Weight (g)	99
<b>Handset LCD display</b>		Easy connect charging plug	•
Menu navigation	•	Charging pins for cradle	•
Display type	Inverted B/W	Charging cradle included	•
B/W or colour	B/W	<b>Technical</b>	
Resolution (H x W)	64*102	Standby time (hours)	280
Display size (H x W)	23*36	Continuous Talk Time (minutes)	Up to 180
Backlit display	•	Battery	850mAh Li-ion
Big display font	•	Power adapter	5V/650mA
Clock & Date	•	GSM 900/1800/1900	•

Doro shall not be held responsible for any errors or omissions contained herein. Specifications are subject to change without notice.

